



## AWL4003

**Common Name** 20 Port (4P/8P/8P) Multiband Curved Panel Antenna

|              |       |       |      |           |
|--------------|-------|-------|------|-----------|
| 617-894MHz   | 4     | Fixed | 7.8  | 75°       |
| 1695-2690MHz | 8     | Fixed | 13.0 | 65°       |
| 3300-4200MHz | 8     | Fixed | 14.7 | 62°       |
| Frequency    | Ports | Tilt  | Gain | Beamwidth |

## PRODUCT INFORMATION

This product is a flexible antenna platform that offers multiple ports across multiple bands. The antenna has four ports covering Low Band 617 – 894 MHz, eight ports covering Lower Mid Band 1695 – 2690 MHz and eight ports covering Upper Mid Band 3300 – 4200 MHz. The high port count enables multiple operators to achieve high data rates across LTE and 5G NR bands.

A single curved panel serves as a single sector. Three panels mounted around a center pole forms into a concealed canister with a 22 inch diameter. This canister can be configured with external combiners to create different azimuth pattern profiles. There are a number of mounting options available, making deployments on lamp posts, utility poles, walls and other vertical structures possible.

## APPLICATION

Alpha Wireless multiband small cell provides flexible coverage solutions whilst in an ultra-compact radome design. This small cell modular antenna system can be configured as a single-, dual-, or tri-sector. Three panels can be wrapped around existing infrastructure to provide a middle-of-pole canister solution. The high port count for each sector in multiple bands is for ultimate data throughput in 4G and 5G applications. The antenna is designed to be installed in an urban environment where low visual impact is required.

## STANDARD & CERTIFICATIONS

|               |                     |
|---------------|---------------------|
| Certification | BS EN ISO 9001:2015 |
|---------------|---------------------|



## FEATURES

- Allows 4x4 MIMO on multiple bands for multiple operators
- Fits within 650mm (25.6") height restriction.
- Three curved panels around a pole form a canister.
- Pole-top and side-arm mounting options
- High port count enabling multiple operators
- Compact design - Low visual impact.
- Different fixed tilt configurations.

*The parameters in this specification follow the definitions and recommendations per NGMN P-Basta, Release 9.6.*


## TECHNICAL SPECIFICATION

| Electrical Specifications        |          | Low Band |         |         | Lower Mid Band |           |           |           | Upper Mid Band |           |           |      |
|----------------------------------|----------|----------|---------|---------|----------------|-----------|-----------|-----------|----------------|-----------|-----------|------|
| Connector                        | -        | 4 Ports  |         |         | 8 Ports        |           |           |           | 8 Ports        |           |           |      |
| Frequency Range                  | MHz      | 617-703  | 703-788 | 788-894 | 1695-1995      | 1920-2170 | 2170-2500 | 2500-2690 | 3300-3550      | 3550-3800 | 3800-4200 |      |
| Polarisation                     | Degree   |          |         |         |                |           |           |           |                |           |           |      |
| Gain                             | Basta    | dBi      | 8.1     | 7.8     | 7.3            | 11.8      | 12.2      | 13.2      | 13.2           | 14.2      | 14.7      | 15.0 |
|                                  | Max      | dBi      | 8.6     | 8.3     | 7.8            | 12.3      | 12.7      | 13.7      | 13.7           | 14.7      | 15.2      | 15.5 |
| Azimuth Beamwidth                | Degree   | 69       | 76      | 80      | 65             | 69        | 66        | 70        | 63             | 62        | 61        |      |
| Elevation Beamwidth              | Degree   | 78       | 79      | 80      | 28             | 25        | 22        | 19        | 15.5           | 14.5      | 13.5      |      |
| Electrical Downtilt              | Degree   | 0        |         |         | 2, 4, or 6     |           |           |           | 2, 4, or 6     |           |           |      |
| Electrical Downtilt Deviation    | Degree < | 5        |         |         | 2              |           |           |           | 1.5            |           |           |      |
| Impedance                        | Ohms     | 50       |         |         |                |           |           |           |                |           |           |      |
| VSWR                             | NA <     | 1.5      |         |         | 1.5            |           |           |           | 1.5            |           |           |      |
| Return Loss                      | dB >     | 14       |         |         | 14             |           |           |           | 14             |           |           |      |
| Isolation                        | dB >     |          |         |         |                |           |           |           |                |           |           |      |
| Intraband Isolation              | dB >     | 25       |         |         | 25             |           |           |           | 25             |           |           |      |
| Network-to-Network Isolation     | dB >     | 28       |         |         | 28             |           |           |           | 28             |           |           |      |
| Interband Isolation              | dB >     | 28       |         |         | 28             |           |           |           | 28             |           |           |      |
| Passive Intermodulation          | dBc <    | -153     |         |         | -153           |           |           |           | -153           |           |           |      |
| Cross Polar Discrimination       | dB >     | 16       |         |         | 16             |           |           |           | 16             |           |           |      |
| Maximum Effective Power Per Port | W        | 150      |         |         | 150            |           |           |           | 100            |           |           |      |
| Maximum total input power        | W        | 2,600    |         |         |                |           |           |           |                |           |           |      |

## TECHNICAL SPECIFICATION

| Mechanical Specifications                       |                      |  |
|---|----------------------|--|
| Dimensions                                      | mm (in)              | 650 (25.6) x 475 (18.7) x 180 (7.1) - Antenna                        |
| Dimensions - 3 x Sector around pole             | mm (in)              |  |
| Volume  | l (ft <sup>3</sup> ) | 66.5 (2.35)  |
| Packing Size (LxWxD)                            | mm (in)              | 711 (28) x 508 (20) x 305 (12)                                       |
| Net Weight (antenna)                            | kg (lb)              | 9.5 (21)   |
| Shipping Weight                                 | kg (lb)              | 10 (22)  |
| Connector Type (Female)                         | -                    | 4.3-10   |
| Connector Position                              | -                    | Bottom   |
| Connector Position Quantity                     | -                    | 20 (4 Ports Low Band, 8 Port Lower Mid Band, 8 Ports Upper Mid Band) |
| Windload Frontal (at Rated Wind Speed: 150km/h) | N (lbf)              | 260 (59)   |
| Windload Lateral (at Rated Wind Speed: 150km/h) | N (lbf)              | 90 (20)  |
| Survival Wind Speed                             | km/h (mph)           | 241 (150)  |
| Radome Material                                 | -                    | uPVC   |
| Radome Colour                                   | RAL                  | 7035 (light grey)  |
| Product Compliance Environmental                | -                    | RoHS   |
| Lightning Protection                            | -                    | DC Grounded  |
| Cold Temperature Survival                       | Celsius (Fahrenheit) | -40 (-40)  |
| Hot Temperature Survival                        | Celsius (Fahrenheit) | 70 (158)   |

## Array Layout and RET Information




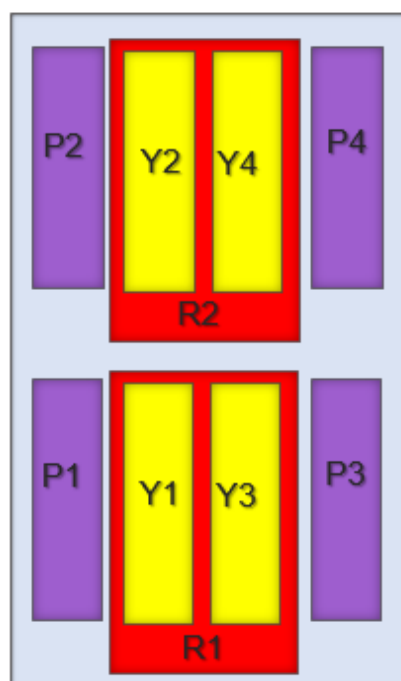


Note: Coloured box sizes do not represent antenna sizes.

| Array | Frequency MHz | Ports   |
|-------|---------------|---------|
| R1    | 617 - 894     | 1 - 2   |
| R2    | 617 - 894     | 3 - 4   |
| Y1    | 1695 - 2690   | 5 - 6   |
| Y2    | 1695 - 2690   | 7 - 8   |
| Y3    | 1695 - 2690   | 9 - 10  |
| Y4    | 1695 - 2690   | 11 - 12 |
| P1    | 3300 - 4200   | 13 - 14 |
| P2    | 3300 - 4200   | 15 - 16 |
| P3    | 3300 - 4200   | 17 - 18 |
| P4    | 3300 - 4200   | 19 - 20 |

TECHNICAL SPECIFICATION


Mechanical Illustration

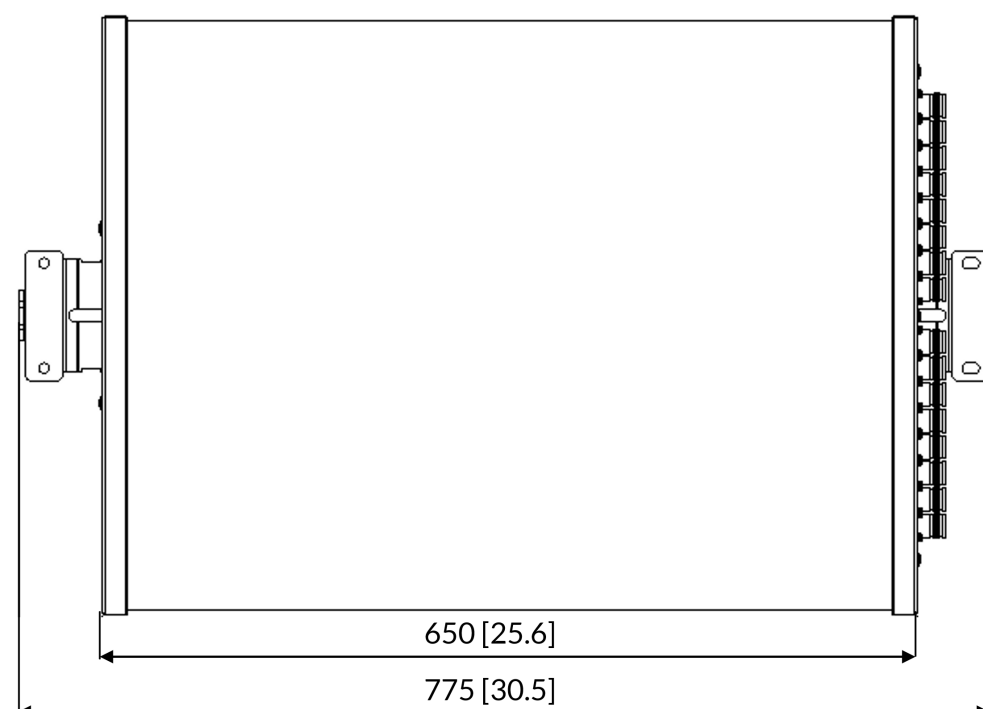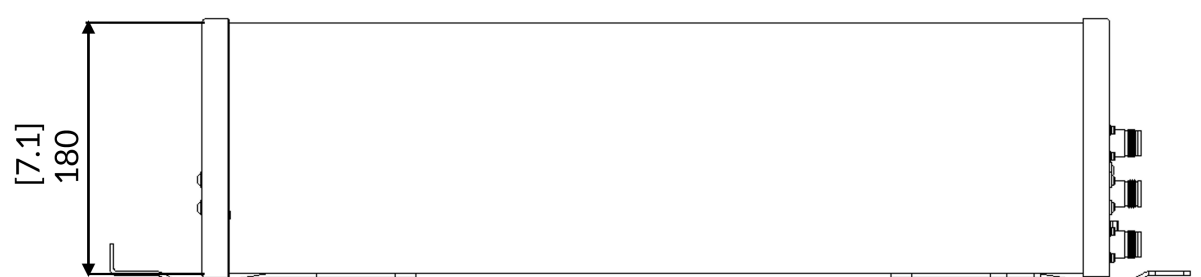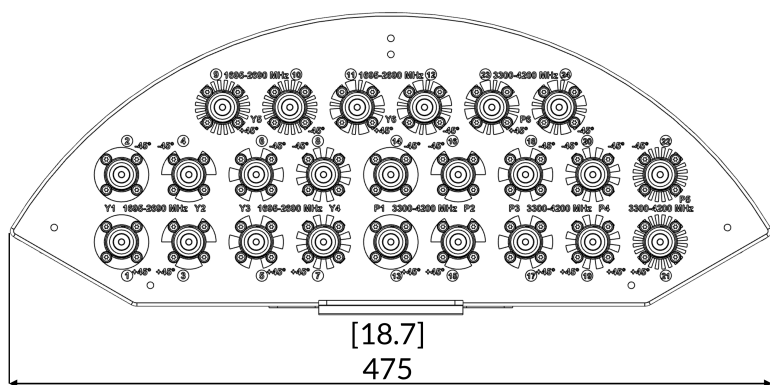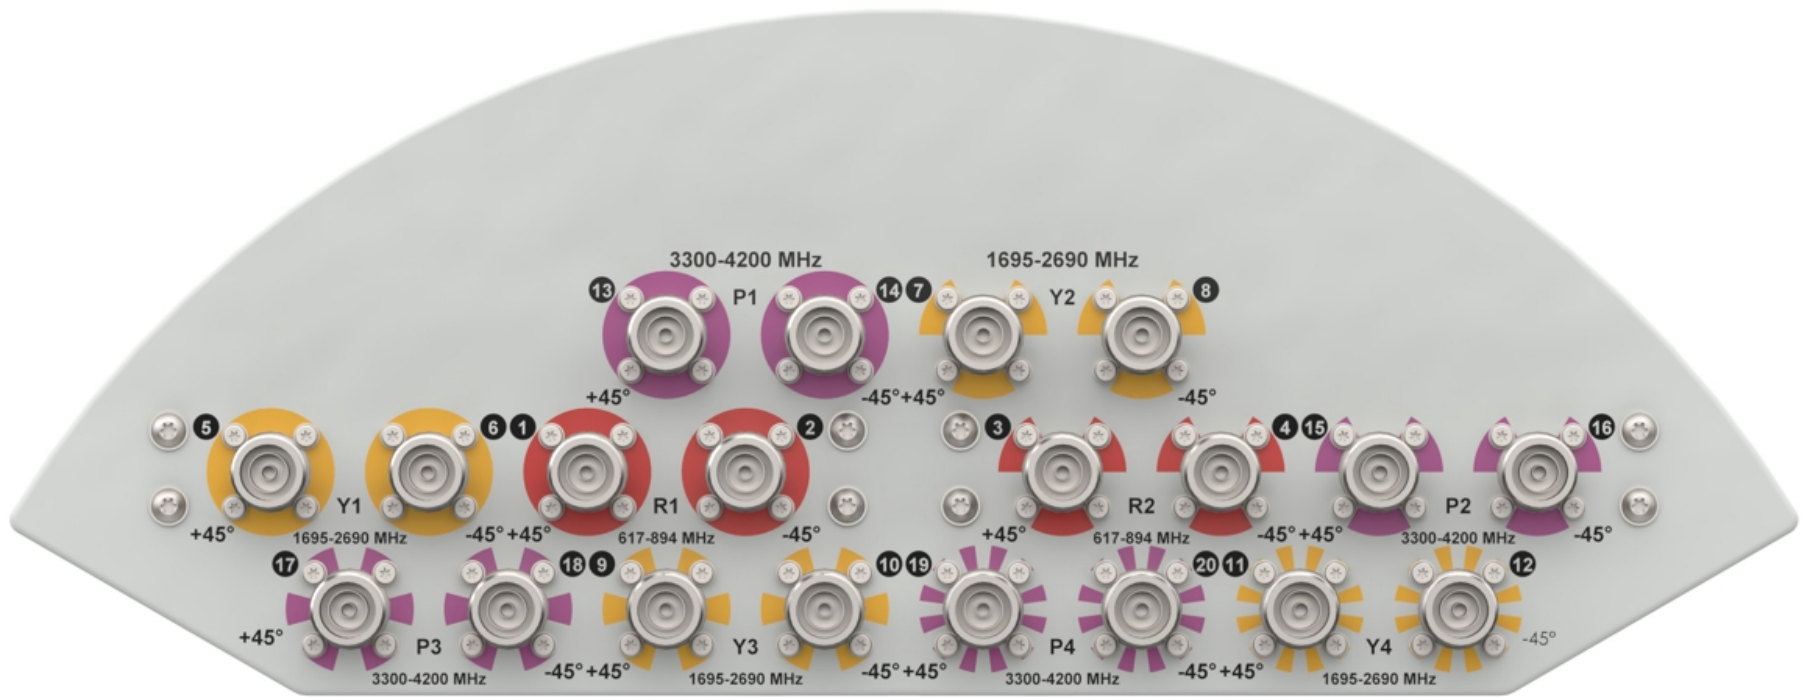

TECHNICAL SPECIFICATION

Mounting Bracket Kit

CL-V-222 – Pole Mount Kit for Tri-Sector Configuration (Ordered separately).

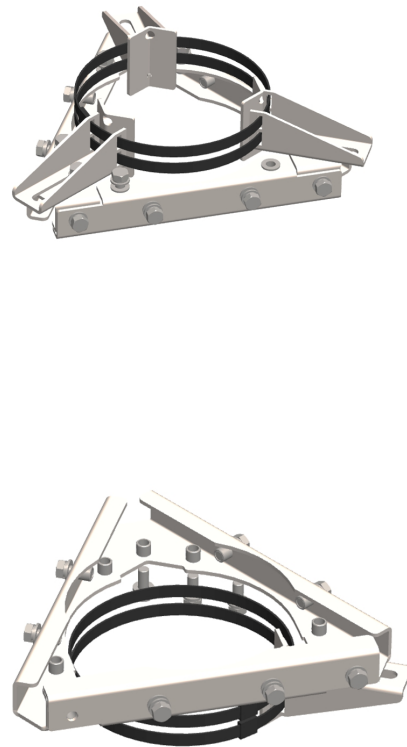

|                                |                              |                                   |
|--------------------------------|------------------------------|-----------------------------------|
| <b>Mounting Kit Tilt Range</b> | <b>Mounting Kit Material</b> | <b>Mounting Kit Pole Diameter</b> |
| 0°                             | Stainless Steel              | 63mm-168mm (2.5" to 6.6")         |

CL-V-214 – Middle of Tapered Pole Mount and Shroud Kit for Tri-Sector Configuration (Ordered separately).




|                                |                                |                                   |
|--------------------------------|--------------------------------|-----------------------------------|
| <b>Mounting Kit Tilt Range</b> | <b>Mounting Kit Material</b>   | <b>Mounting Kit Pole Diameter</b> |
| 0°                             | Stainless and Galvanized Steel | 63mm-168mm (2.5" to 6.6")         |

TECHNICAL SPECIFICATION

Mounting Bracket Kit

CL-V-215 – Top of Pole Mount Kit and Shroud Kit for Tri-sector Configuration (Ordered separately).

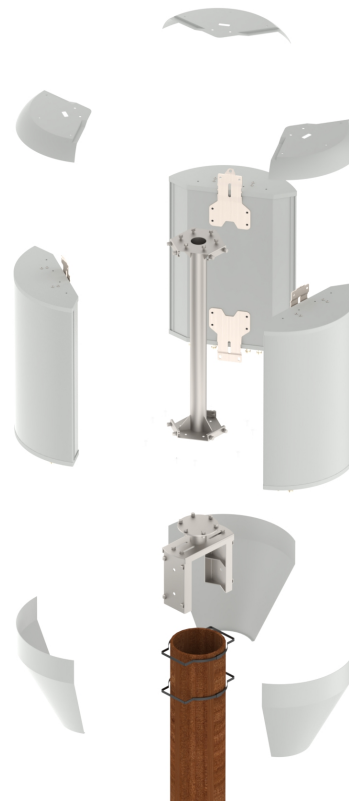

| Mounting Kit Tilt Range | Mounting Kit Material          | Mounting Kit Pole Diameter |
|-------------------------|--------------------------------|----------------------------|
| 0°                      | Stainless and Galvanized Steel | 152mm-203mm (6" to 8")     |

CL-V-216 – Stood off from Pole Mount and Shroud Kit for Tri-Sector Configuration (Ordered separately).



| Mounting Kit Tilt Range | Mounting Kit Material          | Mounting Kit Pole Diameter |
|-------------------------|--------------------------------|----------------------------|
| 0°                      | Stainless and Galvanized Steel | 152mm-254mm (6" to 10")    |



## TECHNICAL SPECIFICATION

### Ordering Info

#### Sector Panel Configurations

The AWL4003 refers to a single panel antenna. The customer may order one, two, or three of the AWL4003 for Single-sector, Dual-sector, and Tri-sector deployments, respectively. The mount bracket and shroud kit are ordered separately.

#### Fixed Tilt Options

This antenna can be ordered with different Fixed Electrical Tilt values for each frequency band.

The Order Code is structured as 'AWL4003-RxYyPz' in which x, y, and z specify the Fixed Electrical Tilt options for each frequency band.

**Ordering Information** Select from the following order codes.

| Electrical Tilt Options For Each Band |              |              | Order Code       |
|---------------------------------------|--------------|--------------|------------------|
| 617-894MHz                            | 1695-2690MHz | 3300-4200MHz |                  |
| 0°                                    | 2°           | 2°           | AWL4003-R0Y2P2-F |
| 0°                                    | 2°           | 4°           | AWL4003-R0Y2P4-F |
| 0°                                    | 2°           | 6°           | AWL4003-R0Y2P6-F |
| 0°                                    | 4°           | 2°           | AWL4003-R0Y4P2-F |
| 0°                                    | 4°           | 4°           | AWL4003-R0Y4P4-F |
| 0°                                    | 4°           | 6°           | AWL4003-R0Y4P6-F |
| 0°                                    | 6°           | 2°           | AWL4003-R0Y6P2-F |
| 0°                                    | 6°           | 4°           | AWL4003-R0Y6P4-F |
| 0°                                    | 6°           | 6°           | AWL4003-R0Y6P6-F |

## Enquiries

#### Global Headquarters

Ashgrove Business Centre,  
Ballybrittas, Portlaoise,  
R32 DT0A, IRELAND  
[sales@alphawireless.com](mailto:sales@alphawireless.com)  
+353 57 86 33847

#### North America

7301 W. 129th Street, Suite 150,  
Overland Park,  
KS 66213, USA  
[sales@alphawireless.com](mailto:sales@alphawireless.com)  
+1 913 279 0008

#### Australia

3/76 Regentville Rd,  
Jamisontown,  
NSW 2750, AUSTRALIA  
[sales@alphawireless.com](mailto:sales@alphawireless.com)  
+ 61 2 4504 8212

#### DISCLAIMER

The information in this document is provided solely regarding Alpha Wireless products. The information is not a guarantee of performance or characteristics. Alpha Wireless reserves the right to modify, change, amend, improve or make corrections to this document and its products, at any time and its sole discretion without prior written consent or notice. No license to any intellectual property rights is granted or implied under this document. Alpha Wireless disclaims warranties and liabilities of any kind including non-infringement of intellectual property rights of any third party.