



AW3874-E-F

Common Name 8 Port, (4P/4P) 1.0M Multi-band Panel 65°

Frequency	Ports	Tilt	Gain	Beamwidth
896-960MHz	4	eRET	12	65°
3300-3800MHz	4	eRET	18	65°

PRODUCT INFORMATION


This antenna has four Low Band ports and four Mid Band ports. Remote Electrical tilt allows tilt optimisation to improve coverage and throughput. Designed for compact, aesthetically pleasing applications.

APPLICATION

Alpha Wireless panel antennas provide wireless network operators the highest performance and quality. Panel antennas are generally used in sectorized applications. These antennas are designed for optimal radiation patterns improving overall network performance. A horizontally spaced array provides enhance MIMO performance with full 4x4 operation or receive diversity RF functions.

STANDARD & CERTIFICATIONS

Certification	BS EN ISO 9001:2015
---------------	---------------------

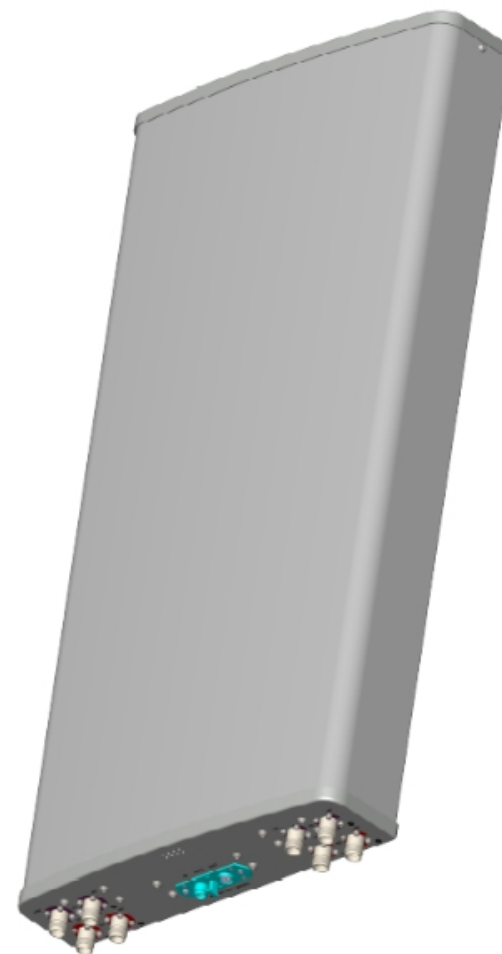

FEATURES


- Wide-band antenna
- 4x4 MIMO for maximum throughput
- Remote Electrical Tilt controlling High and Low Band
- RET is AISG 2.0 compatible.

The parameters in this specification follow the definitions and recommendations per NGMN P-Basta, Release 9.6.


TECHNICAL SPECIFICATION

Electrical Specifications								
Frequency Range	MHz	896-918	918-940	940-960	3300-3400	3400-3600	3600-3800	
Polarisation	Degree	+/- 45° Slant Linear						
Gain	Basta	dBi	11.9±0.5	11.9±0.5	11.9±0.5	17.3±0.5	17.4±0.5	17.5±0.5
	Max	dBi	12.4	12.4	12.4	17.8	17.9	18.0
Azimuth Beamwidth	Degree	65°	65°	65°	67°	68°	69°	
Azimuth Beam Squint	Degree<	5°			5°			
Elevation Beamwidth	Degree	23°	23°	23°	7.0°	6.9°	6.8°	
Electrical Downtilt	Degree	T2°-T10°	T2°-T10°	T2°-T10°	T0°-T10°	T0°-T10°	T0°-T10°	
Electrical Downtilt Deviation	Degree<	2°	2°	2°	2°	2°	2°	
Impedance	Ohms	50						
VSWR	<	1.5						
Return Loss	dB>	14						
Isolation	dB>	25	25	25	25	25	25	
Front to Back Ratio: Total Power +/-30°	dB>	22	22	22	25	25	25	
Passive Intermodulation	dBc<	150	150	150	N/A	N/A	N/A	
Upper Sidelobe Suppression, Peak to 20°	dB>	N/A	N/A	N/A	18	18	18	
Cross-Polar Discrimination (0°)	dB>	15	15	15	15	15	15	
Maximum Effective Power Per Port	W	300	300	300	150	150	150	


Representative Pattern Files

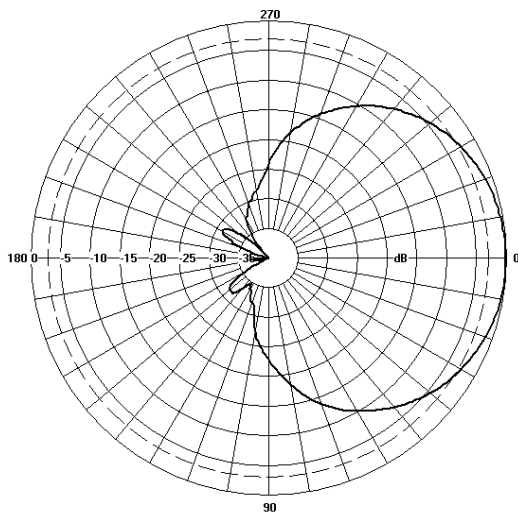

Azimuth

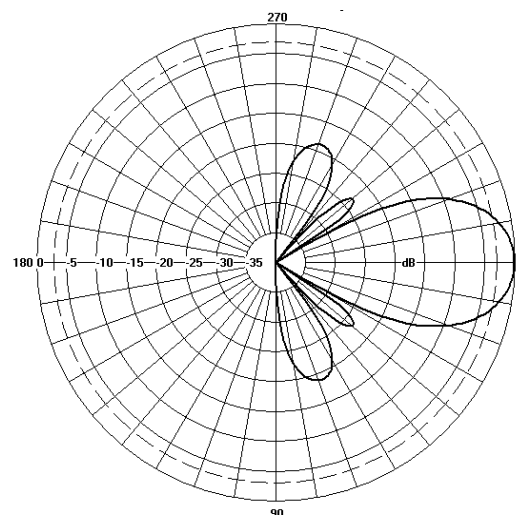

Low Band

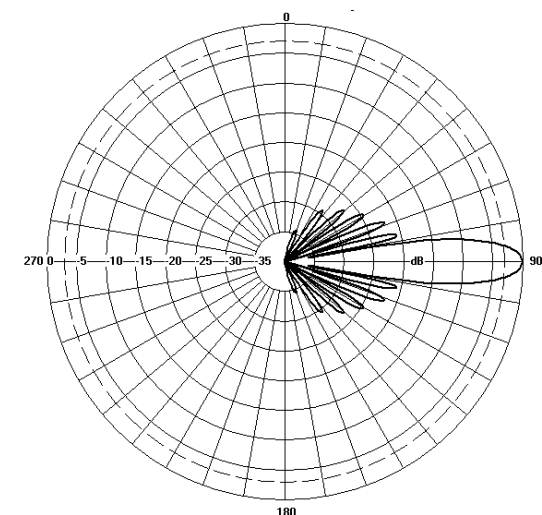

High Band

Elevation

For radiation pattern files, please login at www.alphawireless.com

TECHNICAL SPECIFICATION

Mechanical Specifications

Dimensions	mm (in)	1000 (39.4) x 480 (18.9) x 115 (4.5)
Packing Size (LxWxD)	mm (in)	1200 (47.2) x 530 (20.9) x 275 (10.8)
Net Weight (antenna)	kg (lb)	11.1 (25.5)
Net Weight (mount)	kg (lb)	3 (6.6)
Shipping Weight	kg (lb)	15 (33.1)
Connector Type (Female)	-	4.3-10 (4P Low Band, 4P High Band)
Connector Position	-	Bottom
Connector Quantity	-	8 (4P Mid band, 4P High Band)
Windload Frontal (at Rated Wind Speed: 150km/h)	N	495 (112)
Windload Lateral (at Rated Wind Speed: 150km/h)	N	181 (41)
Survival Wind Speed	km/h (mph)	200 (125)
Radome Material	-	Fibreglass
Radome Colour	RAL	9010
Product Compliance Environmental	-	RoHS
Lightning Protection	-	DC Grounded
Cold Temperature Survival	Celsius (Fahrenheit)	-40 (-40)
Hot Temperature Survival	Celsius (Fahrenheit)	70 (158)

Remote Electrical Tilt (RET) Information

Enclosed Remote Electrical Tilt (eRET) Information

Configuration

896-960MHz	One RET Motor Controller per 2 Port Array
3400 - 3800 MHz	One RET Motor Controller per 4 Port Array
Total Quantity	Three RET Motor Controllers

Location and Interface

RET Controller Location	Inside antenna Radome housing.
RET Interface	Pair of AISG 8 Pin DIN Connectors, one Male, one Female.
RET Interface Quantity	Three pairs of AISG 8 Pin DIN Connectors, one per sector.
RET Interface Location	On Connector Plate located at bottom of antenna.


Electrical

Input Voltage	10 - 30V
Power Consumption idle	<1W
Power Consumption active	<10W
Protocol	3GPP / AISG 2.0

TECHNICAL SPECIFICATION

Mounting Bracket Kit

CL-V-105 M8 Mount Kit for Panel (Mount Kit included with antenna)

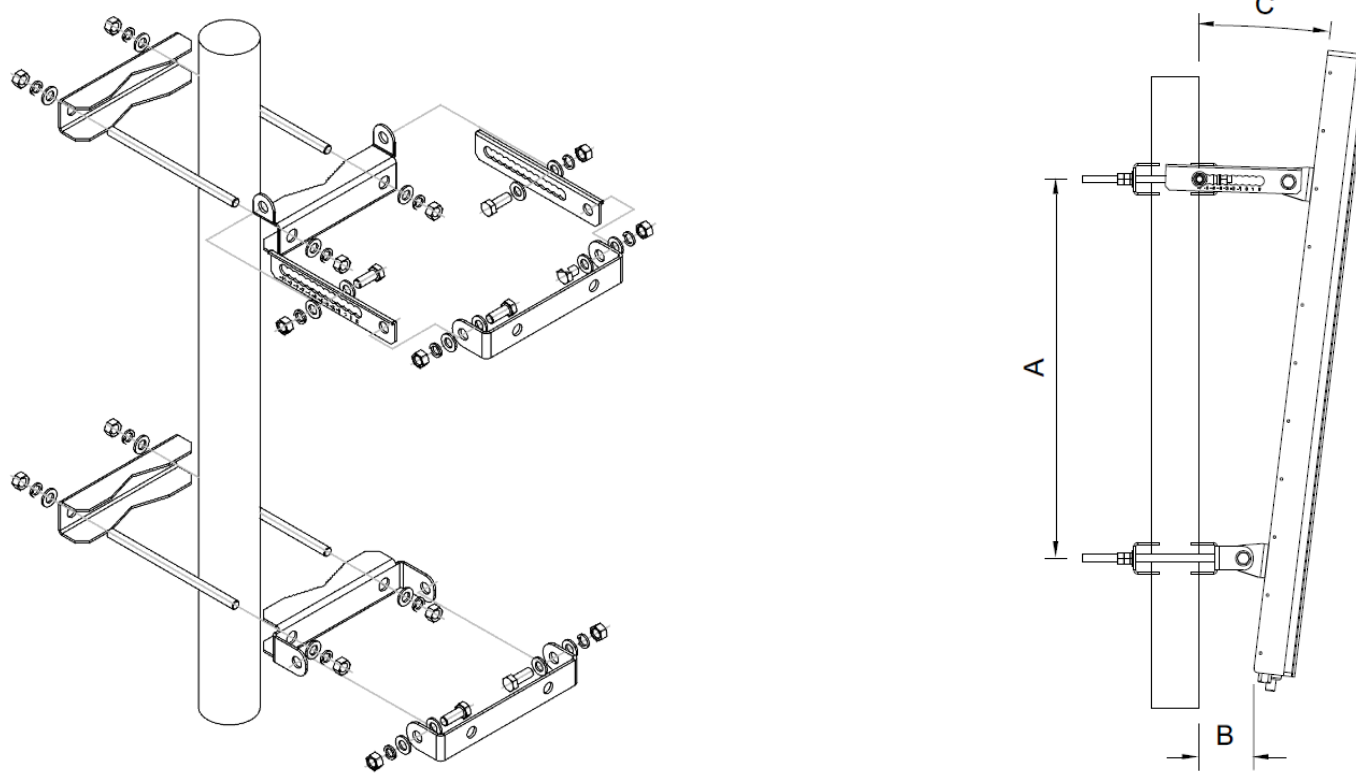

Ordering Info

Order Code - Antenna

AW3874-E-F

Order Code - Accessories

AW1012-2-FM-FM

AW1012-2-FM-NM

AW1014-2-FM-TM

PADC 1000

SADC 2000

AW0326-3-PM-PF

AW0326-10-PM-PF

AW0326-25-PM-PF

AW0326-50-PM-PF

Description

Enclosed Remote Electrical Tilt (eRET) with 4.3-10 Connectors.

Description

RF Jumper Cable, connector types 4.3-10 (m) / 4.3-10 (m), length 2 metres (6'6")

RF Jumper Cable, connector types 4.3-10 (m) / N-Type (m), length 2 metres (6'6")

RF Jumper Cable, connector types 4.3-10 (m) / Nex10 (m), length 2 metres (6'6")

Portable AISG Controller

Site AISG Controller

AISG Jumper Cable Lengths 3 metres (9' 10")

AISG Jumper Cable Lengths 10 metres (32' 9")

AISG Jumper Cable Lengths 25 metres (82')

AISG Jumper Cable Lengths 50 metres (164')

Enquiries

Global Headquarters

Ashgrove Business Centre,
Ballybrittas, Portlaoise, Ireland
Post code: R32 DT0A
sales@alphawireless.com
+353 57 86 33847

North America

7301 W. 129th Street, Suite
150 Overland Park,
KS 66213, USA
sales@alphawireless.com
+1 913 279 0008

Australia

3/76 Regentville Rd,
Jamisontown
NSW 2750 AUSTRALIA
sales@alphawireless.com
+ 61 2 4504 8212

DISCLAIMER

The information in this document is provided solely regarding Alpha Wireless products. The information is not a guarantee of performance or characteristics. Alpha Wireless reserves the right to modify, change, amend, improve or make corrections to this document and its products, at any time and its sole discretion without prior written consent or notice. No license to any intellectual property rights is granted or implied under this document. Alpha Wireless disclaims warranties and liabilities of any kind including non-infringement of intellectual property rights of any third party.